


MPEG4

Video Recording Software

ST3401/ST3402 serves as the best companion of Vivotek 3000 series video servers and network cameras to build the ideal surveillance application. With optimized decoder and display engine, it supports a maximum of sixteen simultaneous connections for recording and monitoring without lag. Multiple screen layouts and full screen display make monitor job painless. The ST3401/ST3402 is definitely an ideal remote surveillance solution for banking, parking garages, construction sites, factory automation, office building, hotel, public security, etc....

ST3401/ST3402

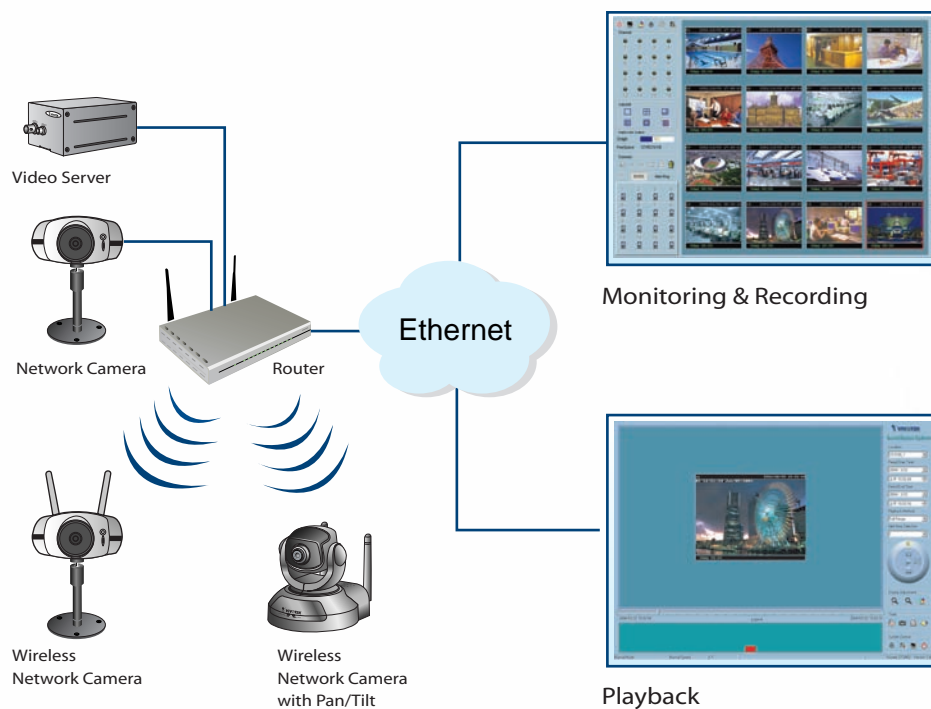

Features

- Multi-channel monitoring and recording simultaneously
- Manual, event driven and scheduler recording mode
- Remote digital output and input indicator
- Zero waiting database searching and event preview
- Remote PTZ camera control
- Hard disk storage indicator and alarm
- High compression ratio and storage capacity
- Audio monitoring/recording support (ST3402)
- Simultaneously multiple window controlling (ST3402)
- Auto launcher after PC rebooting (ST3402)

Channel Numbers

16 channels

Supported Devices

Vivotek video server
 -VS2403, VS3100, VS3102
 Vivotek network camera
 -IP3111, IP3121, IP3112, IP3122, IP3132, IP3133
 -PT3112, PT3122, PT3113, PT3123, PT3114, PT3124

System Requirement Recommendation

-Supported OS: Microsoft Windows 98 SE, ME, 2000, XP, Vista
 -CPU: Intel Pentium IV 2GHZ
 -Memory: 256MB SDRAM
 -Display chip: nVidia TNT, TNT2, GeForce series with 32MB display memory; ATI Radeon series with 32MB display memory(Windows XP, 2000 only)

Video Compression Type

MPEG4 (short header mode)

Frame Rate

NTSC: 1~30 frames per second
 PAL: 1~25 frames per second

Exporting Format

AVI file with synchronized audio/video,
 printer, bitmap for snapshot

Resolution

NTSC: 176x120, 352x240
 PAL: 176x144, 352x288
 CMOS: 160x120, 320x240

Motion Detection

Three detection windows for each channel with intelligent adaptive motion detection by modifying the sensitivity and object size



Recording

• **Mode**
 Manual control, event driven, scheduled
 Video only, audio only, or both

Playback

• **Scheme**
 Date, time interval, and event triggering with preview for every camera
 • **Controls**
 Play, Stop, Pause, Fast Forward, Slow Forward, Pull-bar, Zoom in, Zoom out
 • **Speed**
 Available from 1/16~16 times speed

Alarm Features

Monitoring 16 channels I/O
 In-image motion detection indication
 Local warning sound

★ Refer to Vivotek web site for a list of supported devices

All specifications are subject to change without notice.
 All other trademarks are owned by their respective companies.

VIVOTEK INC.

6F, No.192, Lien-Cheng Rd., Chung-Ho, Taipei County, Taiwan
 Tel : +886 2 82455282
 Fax: +886 2 82455532
 E-mail : sales@vivotek.com
 Http : //www.vivotek.com

